

Fellowes Array Relay

Electrical Specifications

Power Supply	DC input: 12V 3Amps
Power Consumption	36 Watts
LAN	1000Mbps Ethernet ports, RJ45 connectors
Cable Type	Cat5e or greater (not included)
Communication (requires internet connection)	BACnet/IP
LED 1	Green = Connected to Viewpoint Amber = Connected to Internet Red = No connection
Power LED	On/Off

Compliance

Regulatory	FCC, CE, UKCA
EMC	EN 55032/5 EN 61000-6-2 EN 61000-6-3
Safety	EN/UL/IEC 62368-1
Warranty	5 years



Code	Dimensions (L x W x H)	Weight (lbs.)	Color
	5.59 x 3.33 x 0.98	1.21	Black

Mechanical Specifications

Housing Material	Aluminum
Mounting Bracket	4.33in x 4.33in
Passive Cooling	Fanless

Environmental & Reliability

Operating Temperature	Commercial: 32°F to 140°F & Industrial: -40°F to 176°F
Storage Temperature	-40°F to 185°F
Relative Humidity	10% to 90% (operation) 05% to 95% (storage)

Fellowes Array BMS Integration Components

BACnet/IP

Used in nearly 65% of all projects globally and over 80% in the US, BACnet/IP supports integrating real-time air quality data into existing BMS/BAS to reduce energy costs and maximize building efficiency.



Ethernet


Transmit data using ethernet cable and receive firmware updates.

IEEE 802.3
Data rate: CAT 5e or greater

Array® Relay

BACnet/IP enabled gateway transmits data from Fellowes Viewpoint Plus to your BMS/BAS.




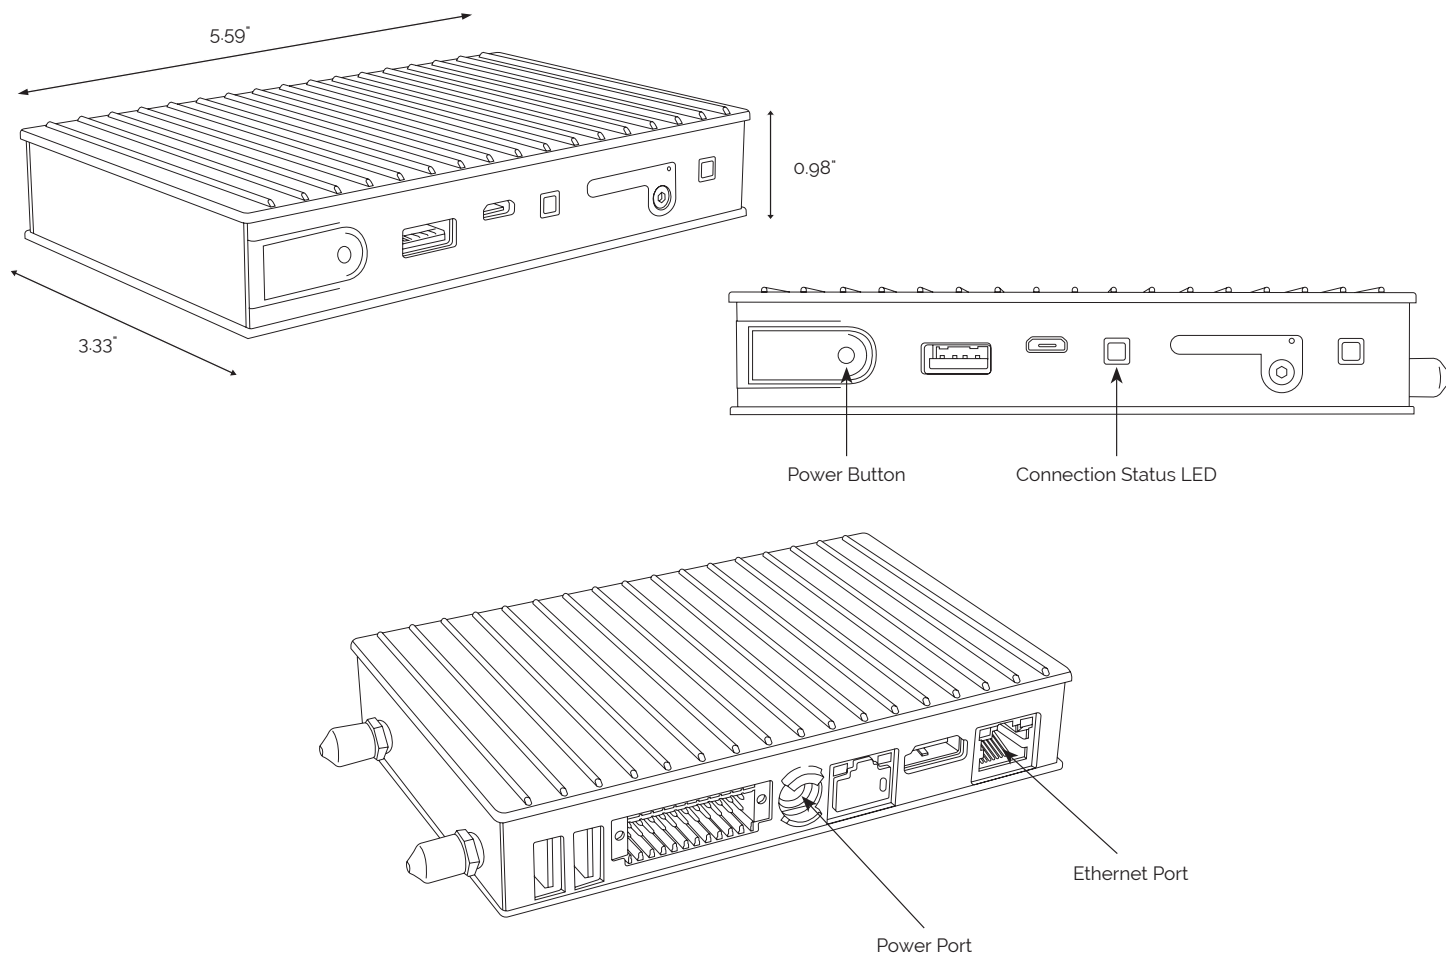

Array Relay

Mounting Type

Wall mounted with bracket
Rack mounted with bracket



Electrical Requirements

Plug in
DC input: 12V 3Amps

Hardware Provided

- White box for power supply (power supply inside)
- White paper bag with screws for the wall/rail mounting bracket
- Wall/Rail mounting bracket
- Relay Unit
- User Manual